


Scram Solenoid Pilot Valve

The Scram Solenoid Pilot Valves (SSPVs) are an integral part of the BWR reactor protection system.

SSPV type 2562 was designed to original specifications and fits into the existing mounting configuration of the BWR Hydraulic Control Unit with no hardware modification needed.

- Proven design with no reported malfunctions since initial installation in 2000
- Reliable, short switching times
- Low power consumption reduced aging
- No membranes

Seitz provides spare parts, replacement solenoids and maintenance services for the SSPVs.

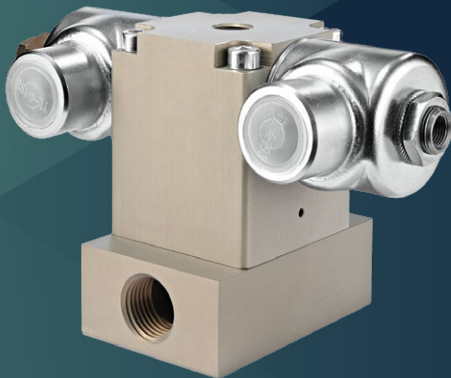

Scram Solenoid Pilot Valve

Scram Solenoid Pilot Valve

Qualifications

Safety class	2
Seismic category	I
Electrical class	1E
Qualification and design bases	IEEE 323-1971, 1974, 1983; IEEE 344-1971, 1975, 1987; IEEE 382-1980, 1985, 1996; IEEE C37, 105-1987; NRC Regulatory Guide 1.100; NRC Regulatory Guide 1.89; NUREG-0588-1979; NMP2-416M, Rev. 0 - 1/29/98
Qualified lifetime *	40 years

*Maintenance cycle: up to 12 years, depending on use and ambient conditions

Harsh environment

Temperature peak	179°C (355°F)
Pressure peak	2.1bar (30psig)
Operating time	110 days under defined pressure and temperature profile
Radiation	1.17×10 ⁸ rad (normal + accidental + 10% margin)
Relative humidity	100%
Submergence	The solenoid valves were submerged for the first 5 s of the DBE simulation to simulate the froth condition
Chemical spray	40.7 l/min/m ² (1 gpm/ft-2)
Seismic	20 g peak between 0.5 to 100 Hz

Order information

Specifications

Valve type 2562

Operating system	Pilot operated with system media fluid
Function	3/2-way
Fluid	Air/Nitrogen
Nominal diameter	14 mm (0.55 in)
Ambient temperature	Max. 40°C (104°F)
Pressure range	1 to 9 bar (15 to 131 psig)
Flow coefficient Kv (Cv)	3.44 (4.00)
Leakage	Max. 1.4 NI/h (23.6 scc/min.)
Weight	0.970 kg (2.14 lbs)
Material	Body: Aluminum Ti-anodized Elastomers: FKM
Response time	at 45 psig < 40 ms at 17.5 psig < 60 ms
Reset from scram	≤ 20 s

Solenoid type 1B74

Rated voltage	24 to 250 V AC/DC (+/- 10%)
Rated power	9 W/15 VA
Frequency range	50 (+/- 3 Hz) to 60 Hz (+/- 3 Hz)
Weight	0.3 kg (0.66 lbs)
Ambient temperature	-30 to 60°C (-22 to 140°F)
Ingress degree	IP 66 (NEMA 4/4X)

NPP references

Nine Mile Point	USA
Perry	USA

Detailed dimensional drawings and 3D models are available on request, please contact us.

Eugen Seitz AG
Spitalstrasse 204
8623 Wetzikon
Switzerland
+41 44 931 80 80
info@seitz.ch

Seitz Valve Technology (Shanghai) Co., Ltd.
Room 910, Building No 67
Hong Cao Rd 421
200233 Shanghai
People's Republic of China
+86 21 3363 3880
information@seitz.cn